









# **Lindell CF825**

# **MODEL FEATURES**

- 52" Blade Span
- 5 Reversible Blades
- LED Light Fixture uses (2)6.5 Watt A15 LED Bulbs (Included)
- No-Light Option
- "Shatter-Resistant" Light Shade
- 3-Speed Pull Chain Operation
- 4.5" Downrod







#### PERFORMANCE SPECIFICATIONS


Speed	Airflow	Electricity Use	Airflow Efficiency	RPM	
Speed	Cubic Ft. Per Min.	Watts (Excl. Lights)	Cubic Ft. Per Min. Per Watt	Revolutions per Minute	
High	4595	65	70	160	
Low	2085	14	155	65	

Blade	Accepts 2.5" DR	Amps	LED Specifications			
Pitch			Lumens	Watts	CRI	CCT (K)
12°	Y	0.6	600	6.5	80	3000

Control Included		Manual/Remote Reverse Switch		Downrod Length	Motor Lead Lengths
3-Speed Pull Chain	N	Manual	N/A	4.5"	80"


#### **ENERGYGUIDE INFORMATION**

## MERGYGUIDE **Estimated Airflow Yearly Energy Cost** 3,418 Cubic Feet Per Minute · The higher the airflow, the more air the fan will move · Airflow Efficiency: 83 Cubic Cost Range of Similar Models (19" - 84") Feet Per Minute Per Watt · Based on 12 cents per kWh and 6.4 hours use per day · Your cost depends on rates and use · Energy Use: 41 Watts All estimates based on typical use, excluding lights ftc.gov/energy Energy information listed above is a weighted average of High and Low speeds tested with the downrod supplied.

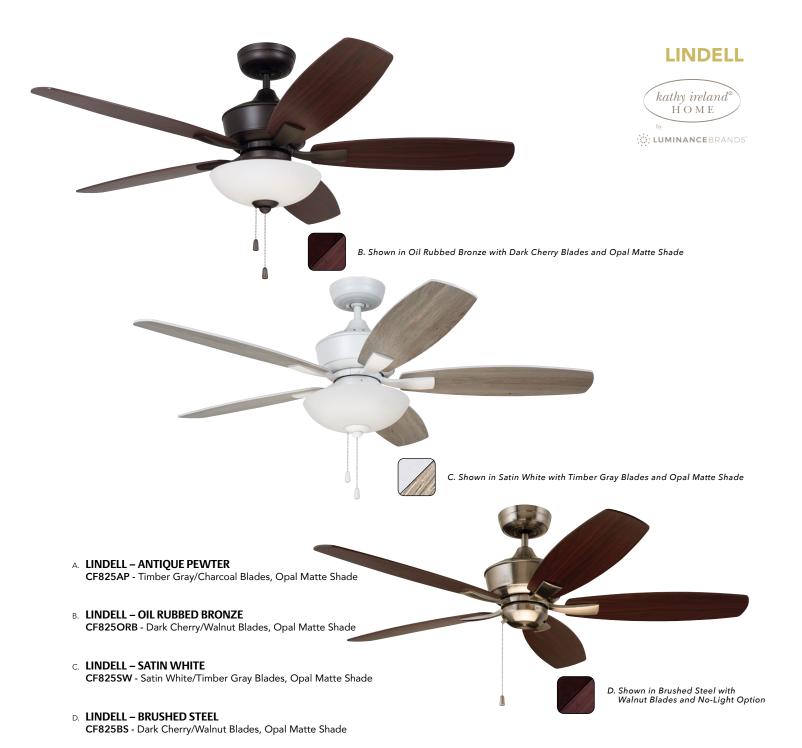

SHIPPING SPECIFICATIONS: Carton Weight: 22.00 LBS | Length: 25.00" | Width: 15.00" | Depth: 12.00"

# **Product Dimensions & Weight**



- A. Total Fan Height: 13.4/17.8"
- B. Bottom of Blade to Ceiling: 12"
- C. Width of Housing: 10"
- D. Width of Canopy: 6.3Motor Size (mm): 153 x 18Product Weight: 17.4 LBS

### **Optional Control**



**SW90** 4-Speed Dual Slide Control