


ASSEMBLY AND INSTALLATION INSTRUCTIONS

WS35461

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

NOTE: Before installing, consult local electrical codes for wiring and grounding requirements.

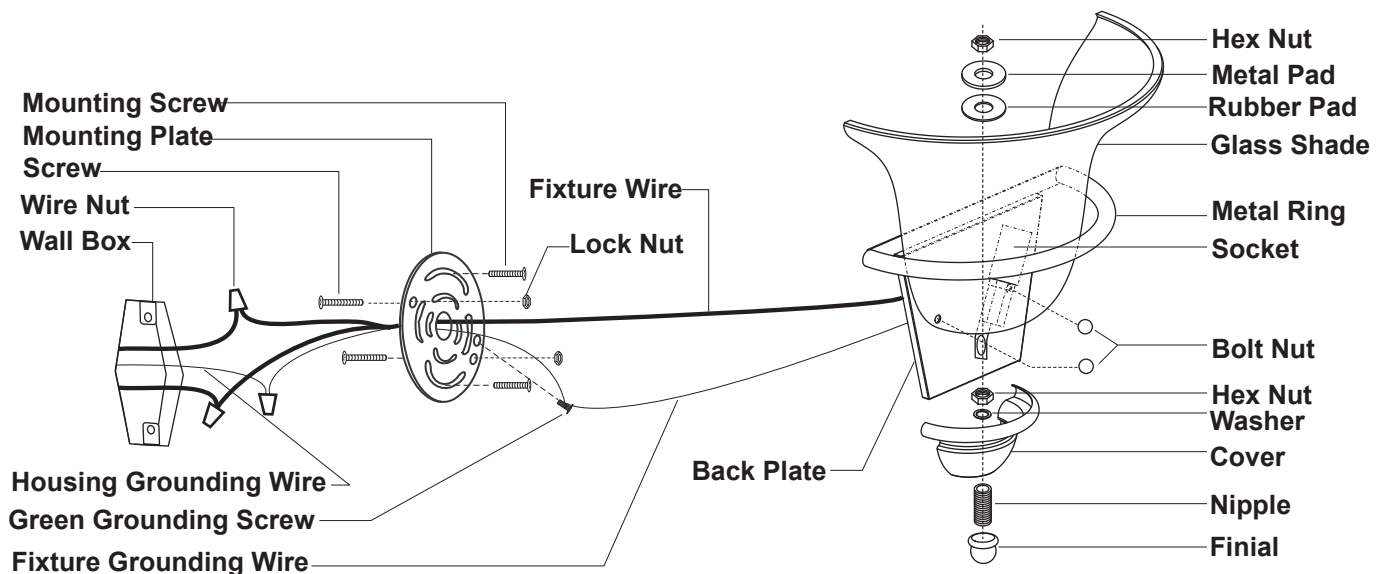

Installation Steps:

1. Thread two screws to the mounting plate outwards, and then secure with two lock nuts.
(You can adjust the length of the screws if necessary.)
2. Attach the mounting plate to the wall box by using two mounting screws.
3. Make wire connections with wire nuts:
 - The black wire from light to the black wire from power source.
 - The white wire from light to the white wire from power source.
 - Attach the fixture grounding wire to the mounting plate with the green grounding screw. Then connect it to the house grounding wire with the wire nut.Carefully tuck wires back into the wall box.
4. Attach the back plate to the mounting plate by inserting the screws, and then secure with two bolt nuts.
5. Secure the nipple into finial. Attach the cover onto the finial by inserting the nipple and secure with a washer and a hex nut.
6. Attach the glass shade onto the cover carefully by inserting the nipple and secure with a rubber pad, metal pad and a hex nut.
7. Place the installed glass shade through the metal ring on the back plate carefully.
8. Install bulbs. **(Please do not exceed the maximum capacity that is recommended on the package.)**
9. Turn on the power at fuse or circuit box.